
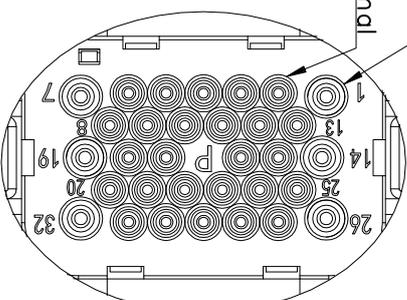

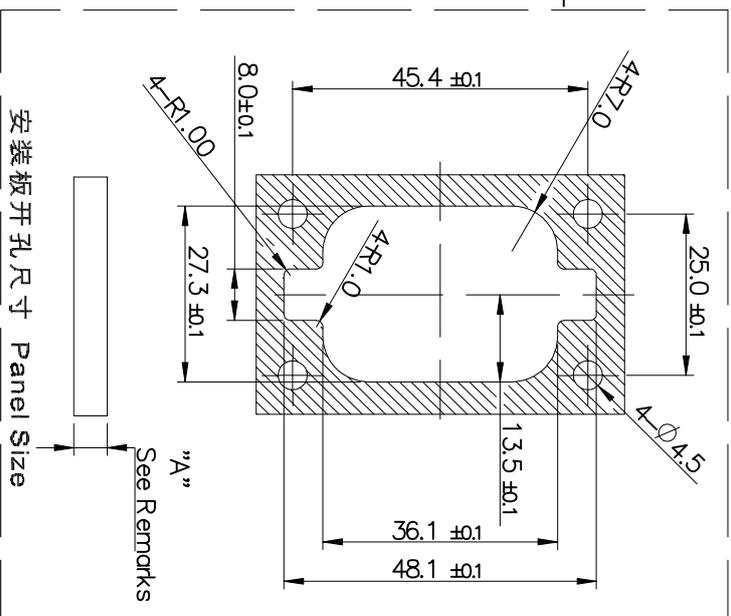
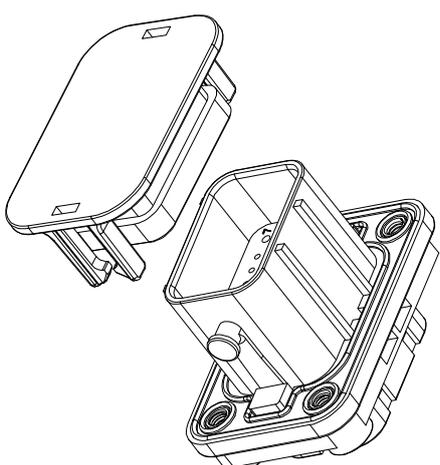

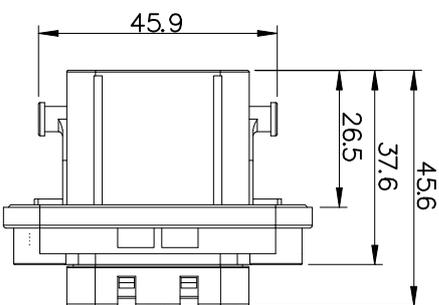


# Customer Drawing

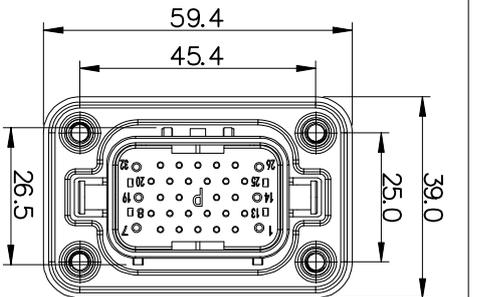

| P/N         | COLOR |
|-------------|-------|
| BS008-32R   | GREY  |
| BS008-32R-B | BLACK |

局部视图 P

- 注: Remarks:
1. 面板厚度为3.5mm, 内六角螺栓头厚度4.0mm (Max) If A=3.5mm, the head thickness of bolt is 4.0mm Max.
  2. 面板厚度为5mm, 内六角螺栓头厚度2.8mm (Max) If A=5mm, the head thickness of bolt is 2.8mm Max.
  3. 平垫圈厚度0.8mm  
The washer thickness is 0.8mm

安装板开孔尺寸 Panel Size

适用端子型号

| 端子种类 Terminal type | 端子料号 Terminal P/N | 适合电缆 Wire range | 电缆外径范围 Wire OD range | 盲插种类 Blind Seal | 盲插料号 Blind Seal |
|--------------------|-------------------|-----------------|----------------------|-----------------|-----------------|
| 16# (Power)        | B08001            | 16*18 AWG       | 2.24*3.00 mm         | 16# (Power)     | B08003          |
| 20# (Signal)       | B08002            | 20*22 AWG       | 1.35*2.50 mm         | 20# (Signal)    | B08004          |

BALE

成都市百勤新能源科技有限公司

重量

材料: / 产品名称: BSC Signal Connector Receptacle

设计: 王富生 日期: 2022/9/6 页码: 1/1 物料编号: 见表格

审核: 批准: 未注公差 (mm): 1位公差: ±1.0 2位公差: ±0.2 3位公差: ±0.2 角度: ±2° 图纸编号: BSC08-32R

B

A

版权归百勤所有, 未经允许, 不得转载, 违者必究

| 版本 | ECN # | 变更内容 | 编制  | 审核  | 日期       |
|----|-------|------|-----|-----|----------|
| A  | -     | 首次发行 | 王富生 | M.D | 2022/9/6 |

版本变更记录

2

3

4